GEORGETOWN SHORES NO. 6
Part of the NE 1/4, and part of the NW 1/4, Section 27, T6N, R13W
Georgetown Township, Ottawa County, Michigan
Sheet 2 of 6

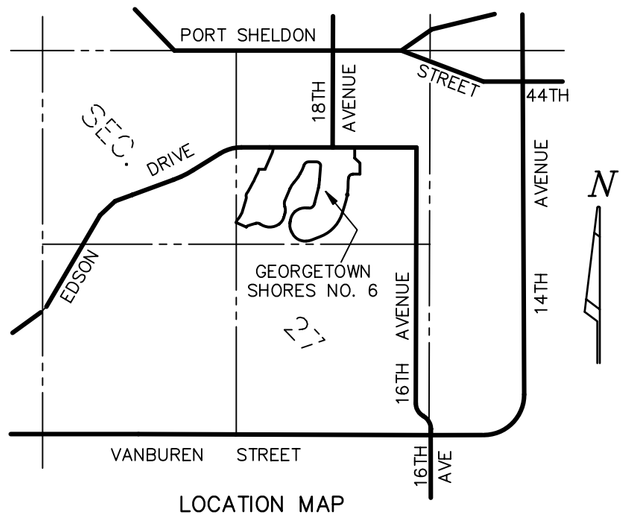

LOCATION MAP
SCALE: 1" = 2000'

This plat is subject to restrictions as required by the Act 288 of 1967, as amended on certain lots with respect to the requirements of the Michigan Department of Environmental Quality, and the Ottawa County Drain Commissioner which are recorded in Liber_____, Page_____ of records of this county.

N

0' 15' 30' 60'
SCALE: 1" = 60'

CURVE TABLE

No.	DELTA	RADIUS	LENGTH	BEARING & CHORD	
11	64°39'49"	267.00'	301.33'	N46°41'23"E	285.59'
12	51°38'25"	37.00'	33.35'	S75°09'30"E	32.23'
13	266°50'59"	60.00'	279.44'	S02°45'47"E	87.15'
14	38°19'43"	37.00'	24.75'	S62°58'35"W	24.29'
15	67°46'58"	333.00'	393.95'	N48°14'58"E	371.38'

LEGEND
All dimensions are in feet.
Plat bearings are based on Georgetown Shores No. 4, Liber 42 of Plats, Pages 64–66.
"o" = 1/2" diameter steel bar, 36" long, encased in 4" diameter concrete cylinder, 36" long monument.
All lot corners are marked by 1/2" diameter steel bars, 18" in length with survey cap marked EXXEL 24597.
Curvilinear measurements are arc measurements.
R = Radial NR = Non–Radial
(0') = distance from intermediate traverse line to 100 year flood plain contour
0' = distance from intermediate traverse line to water's edge.
□ = monument found as described in Georgetown Shores No. 4, Liber 42 of Plats, Pages 64–66.

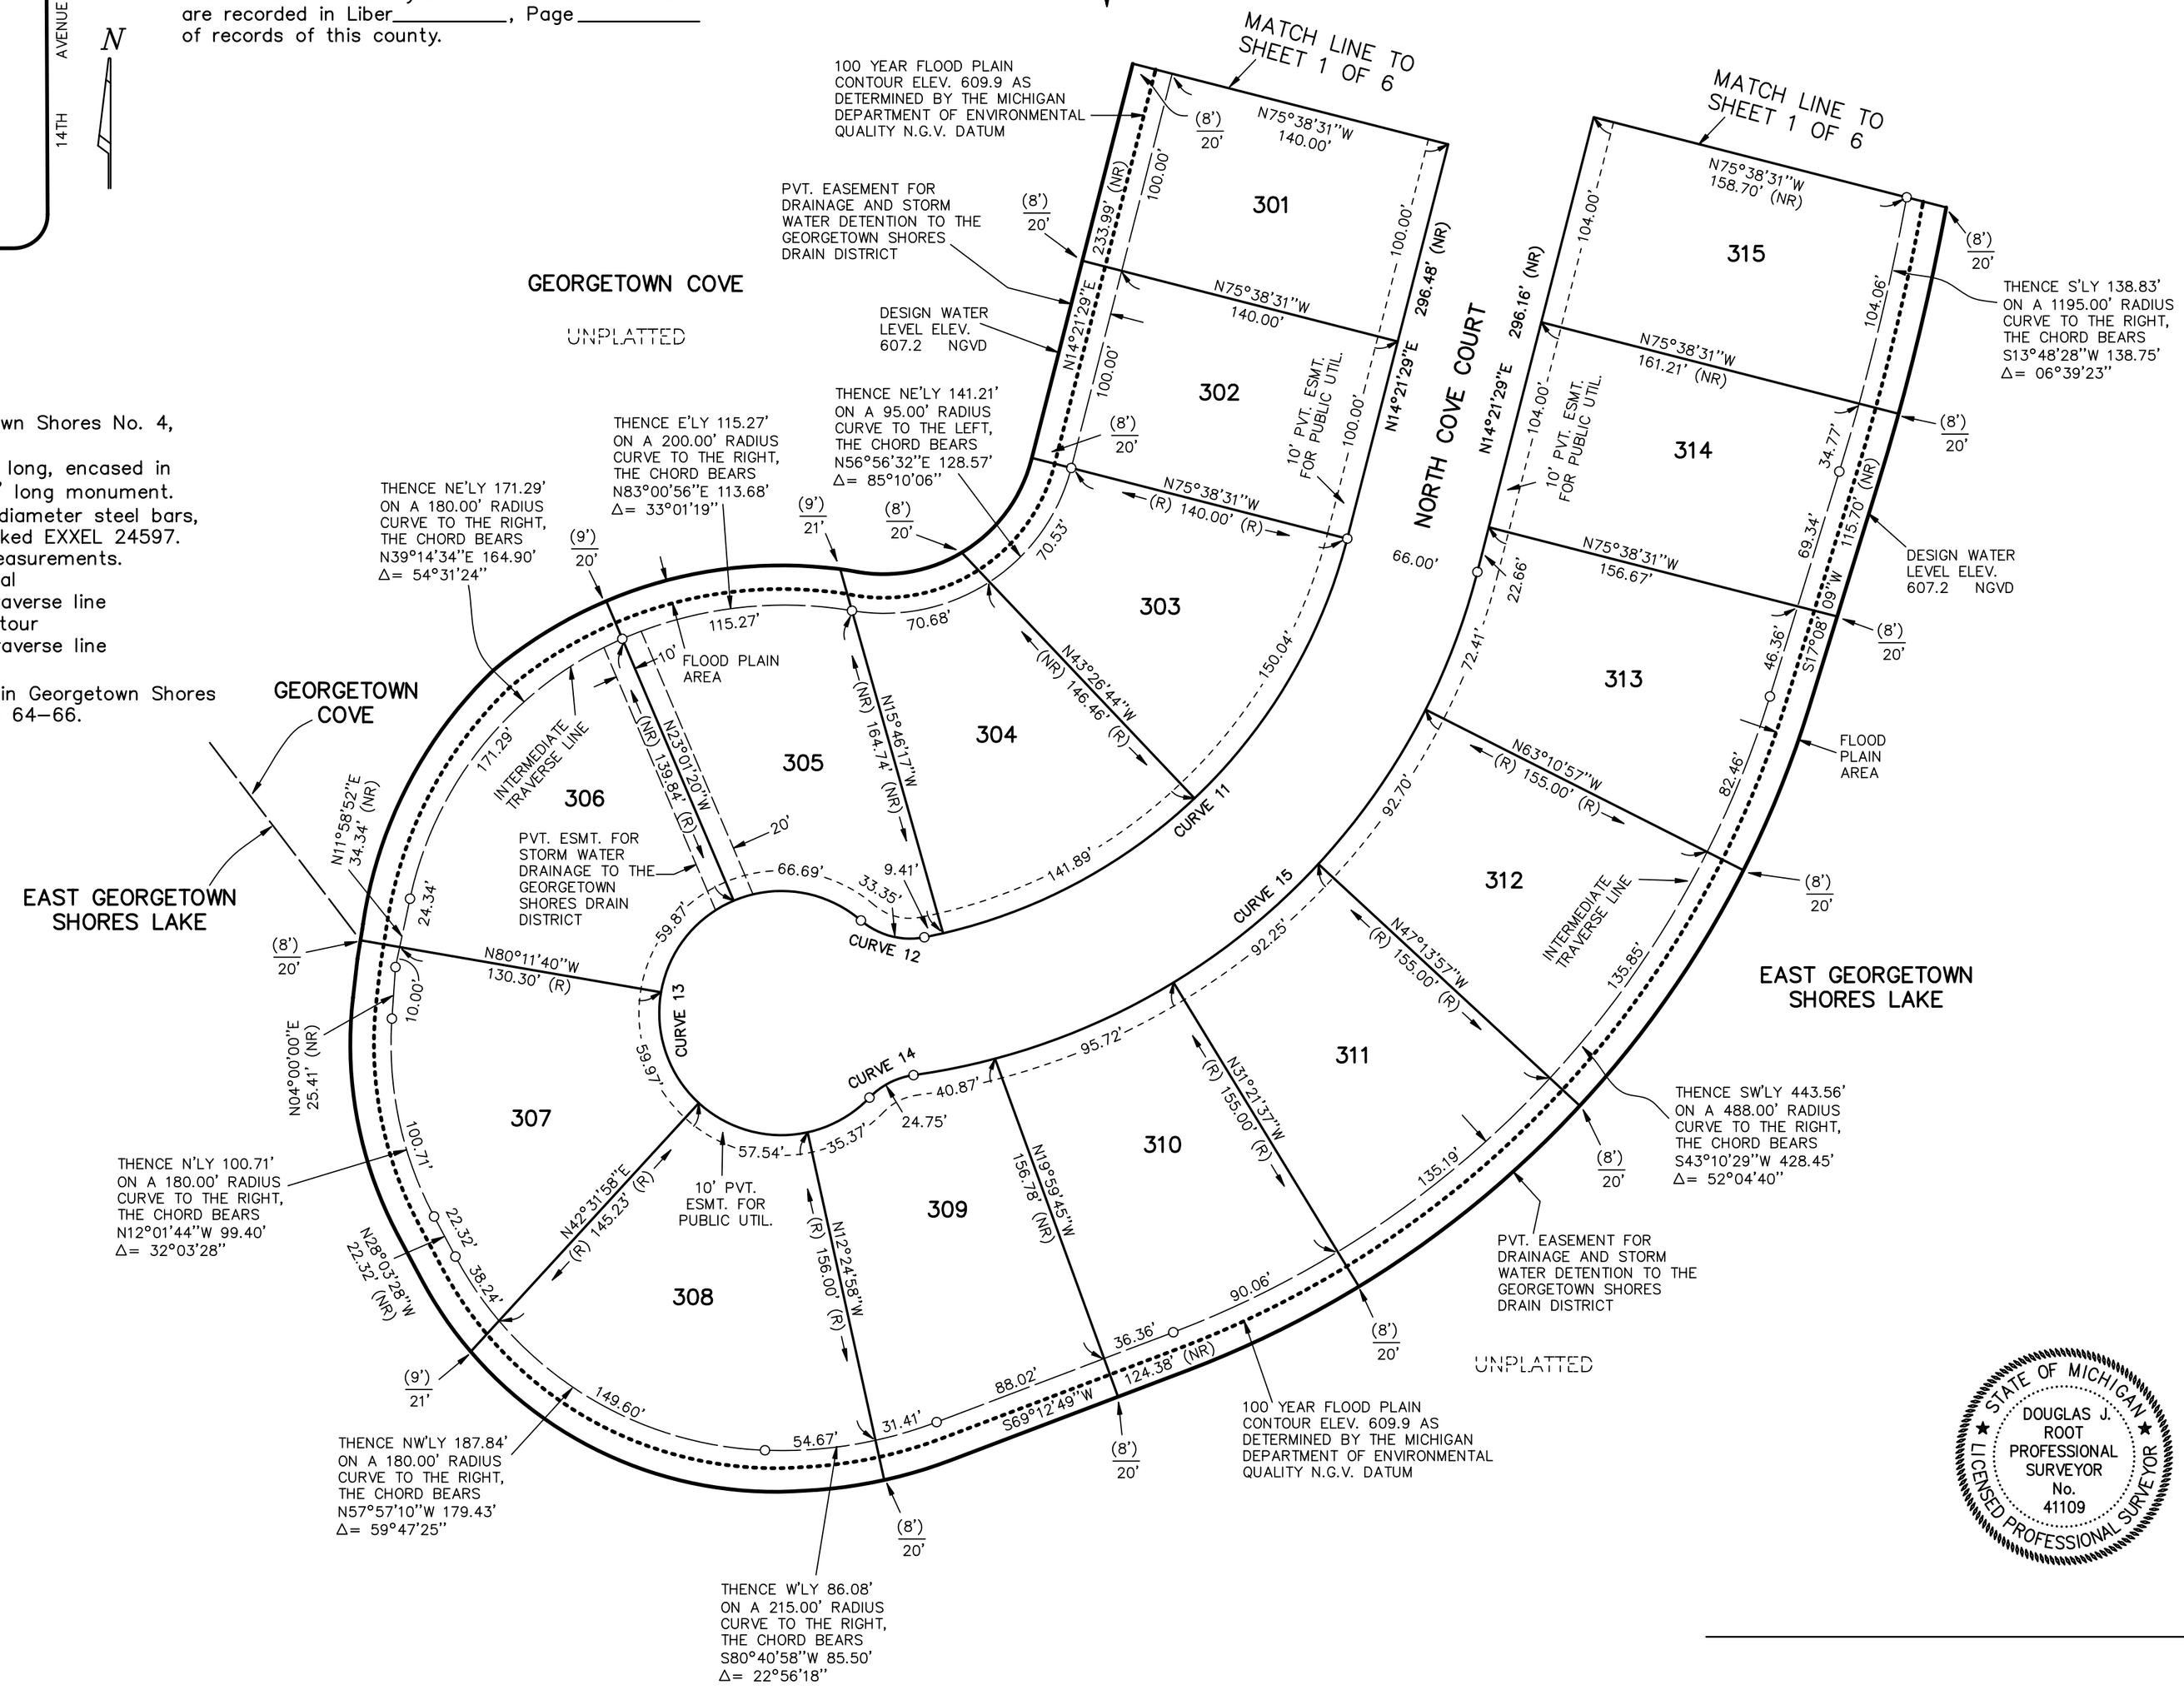

STATE OF MICHIGAN
DOUGLAS J. ROOT
PROFESSIONAL SURVEYOR
No. 41109
LICENSED PROFESSIONAL SURVEYOR